

# INTERNATIONAL STANDARD

# ISO 2697

Second edition  
1999-12-15

---

---

## Diesel engines — Fuel nozzles — Size “S”

*Moteurs diesels — Injecteurs — Taille «S»*



Reference number  
ISO 2697:1999(E)

© ISO 1999

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 734 10 79  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 2697 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 7, *Injection equipment and filters for use on road vehicles*.

This second edition cancels and replaces the first edition (ISO 2697:1974), of which it constitutes a technical revision.

Annex A forms a normative part of this International Standard.

Copyright International Organization for Standardization

# Diesel engines — Fuel nozzles — Size “S”

## 1 Scope

This International Standard specifies the essential dimensional requirements for size “S” fuel nozzles used in diesel engines.

These requirements allow the assembly and interchangeability of the nozzles in the corresponding nozzle holders.

This International Standard is applicable to size “S” nozzles, which comprise hole type, long-stem nozzles (types A1 and A2) and pintle nozzles (type B).

NOTE Type A1 and type B nozzles are the preferred types. The non-preferred hole type, short-stem nozzle, type C, is shown in annex A.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.


ISO 2699, *Diesel engines — Flange-mounted fuel injectors, size “S” — Types 2, 3, 4, 5 and 6.*

ISO 7026, *Diesel engines — Screw-in injection nozzle holders, types 20, 21, 21.1 and 27 for pintle nozzle size “S”, type “B”.*

ISO 7030, *Road vehicles — Screw-mounted injection nozzle holders, types 12, 13, 14, 15, 16, 17, 18 and 19.*

### 3 Dimensions and tolerances

See Figures 1 and 2 and Table 1.

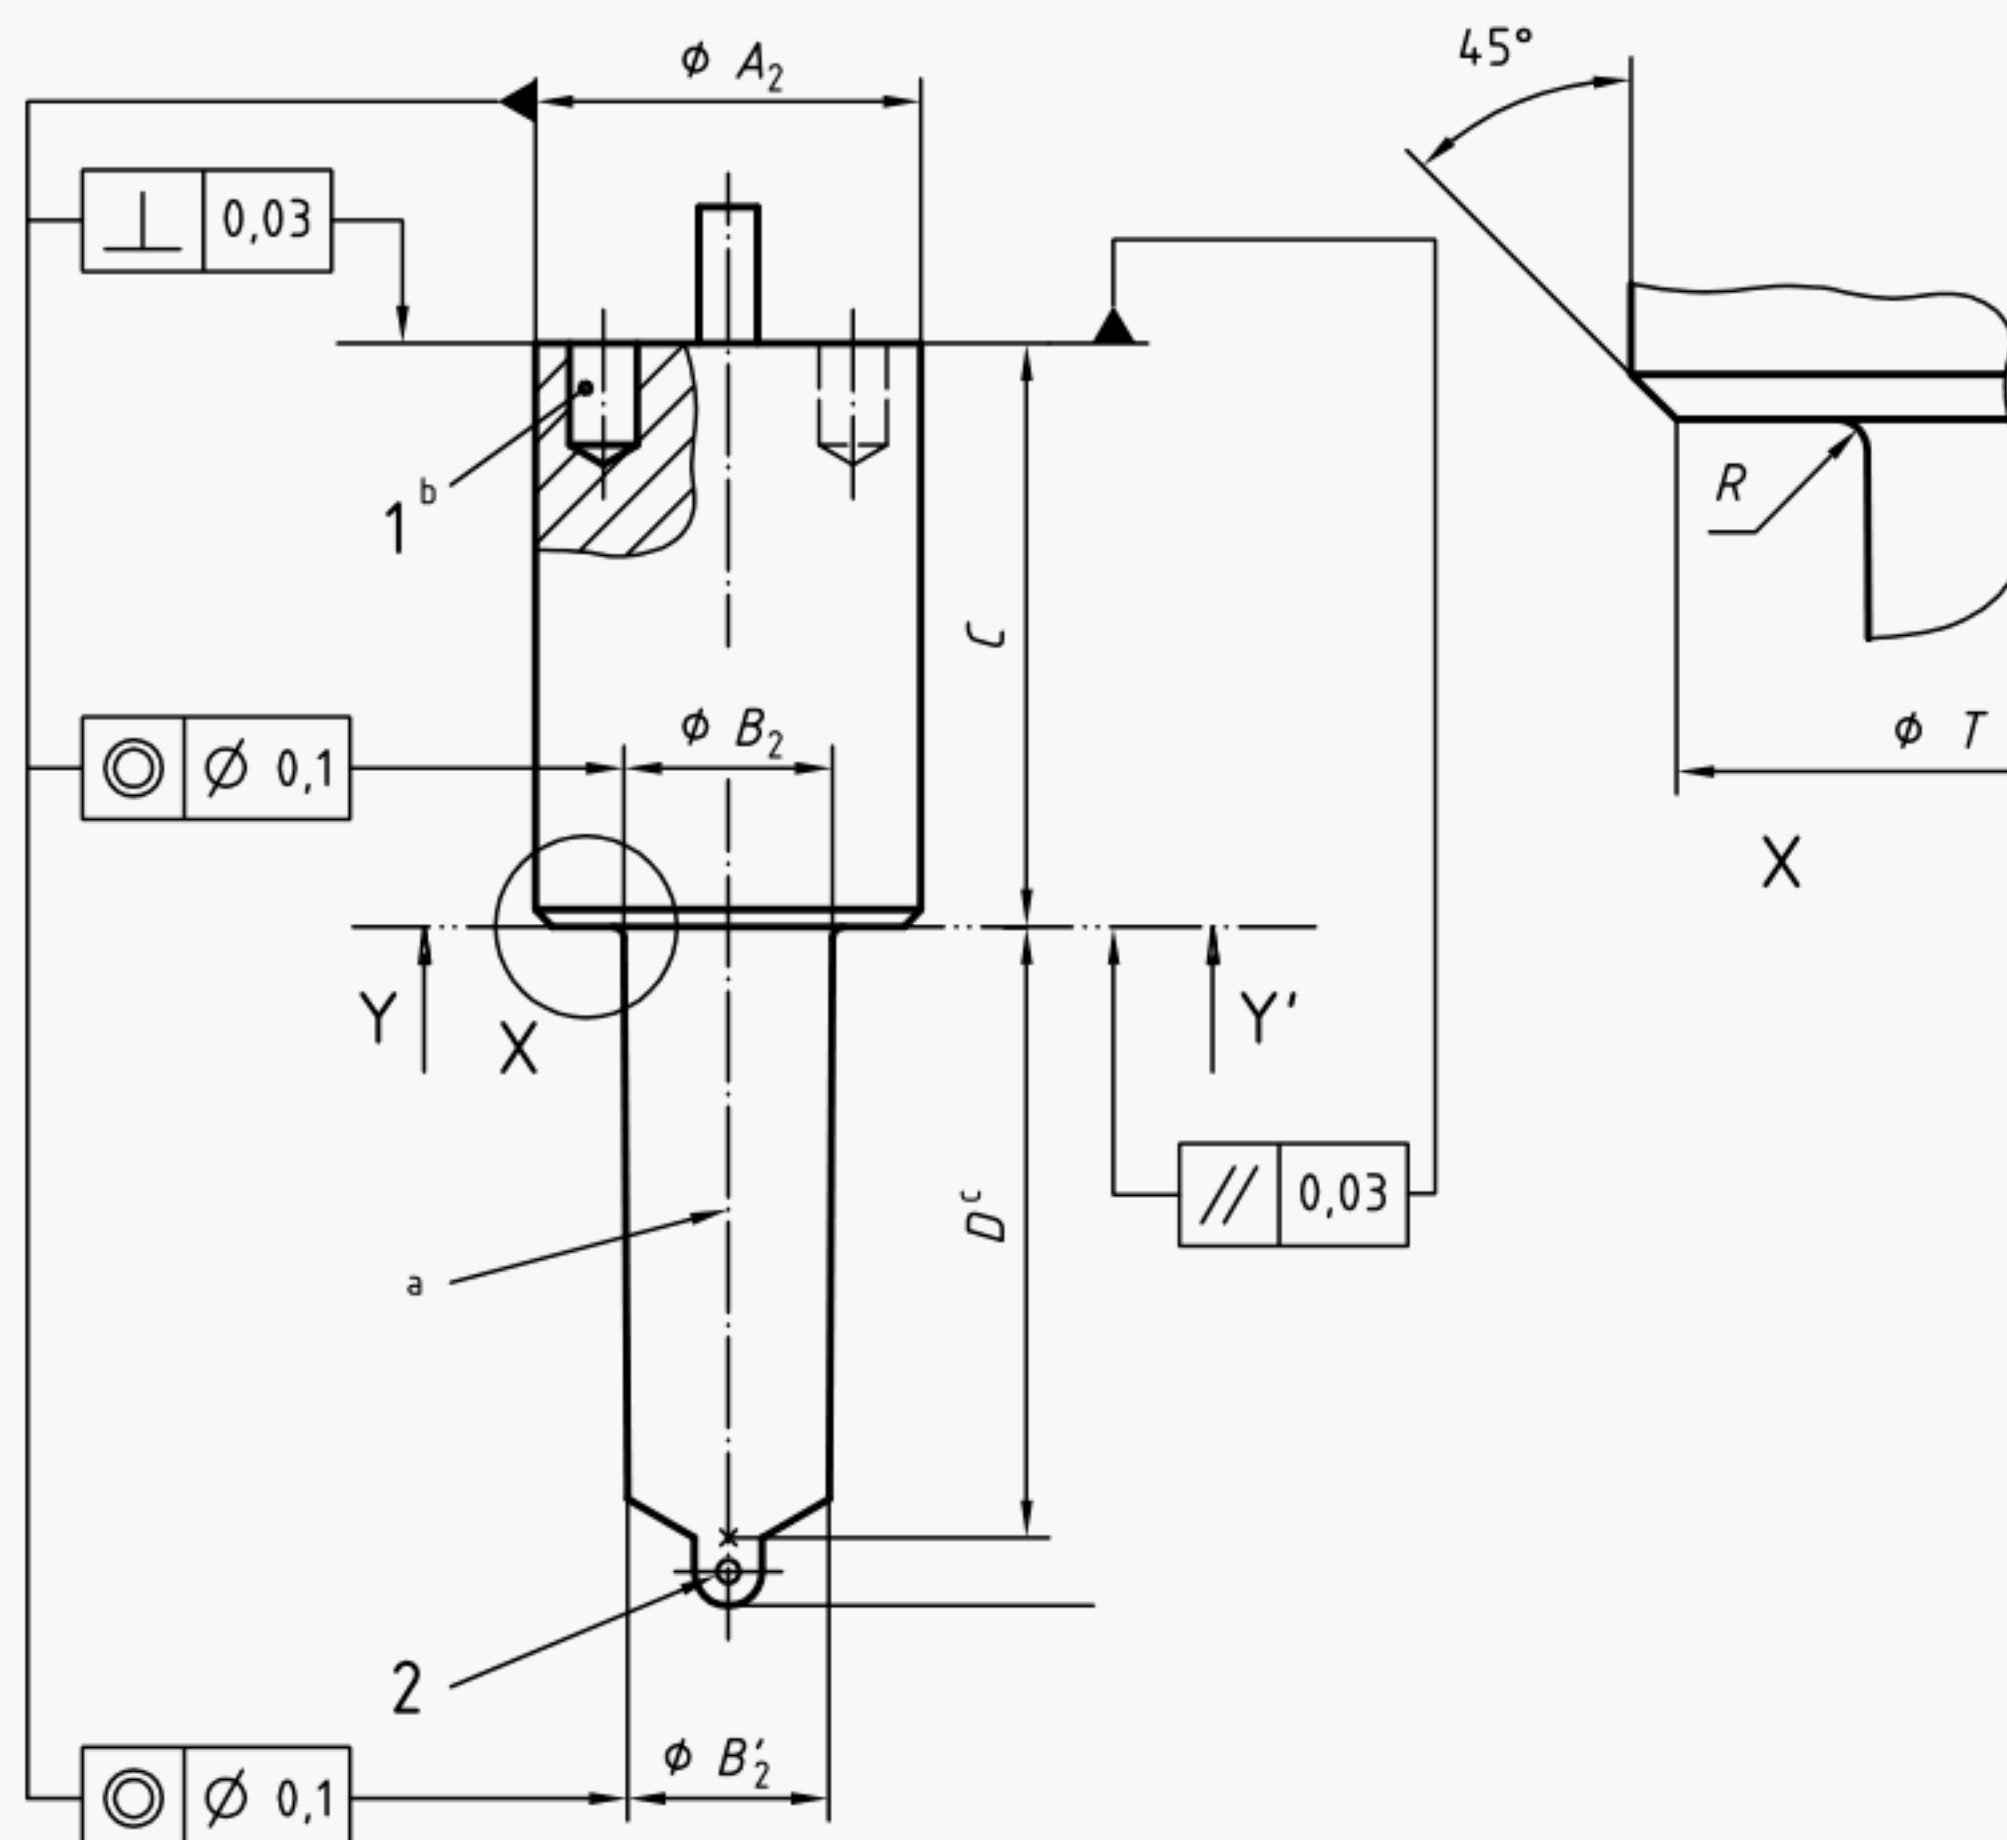


#### Key

- 1 Fuel feed groove
- 2 Injection holes

- a The reference axis for the nozzle passes through the centre of the circle of diameter  $A_2$ .
- b A fuel feed groove is necessary only on nozzles without dowel holes and on nozzles having multiple fuel feed holes.
- c This dimension determines the distance between the reference plane YY' and the point of intersection of the axes of the injection holes with the nozzle axis.

**Figure 1 — Hole type, long-stem nozzle — Type A1 and Type A2**

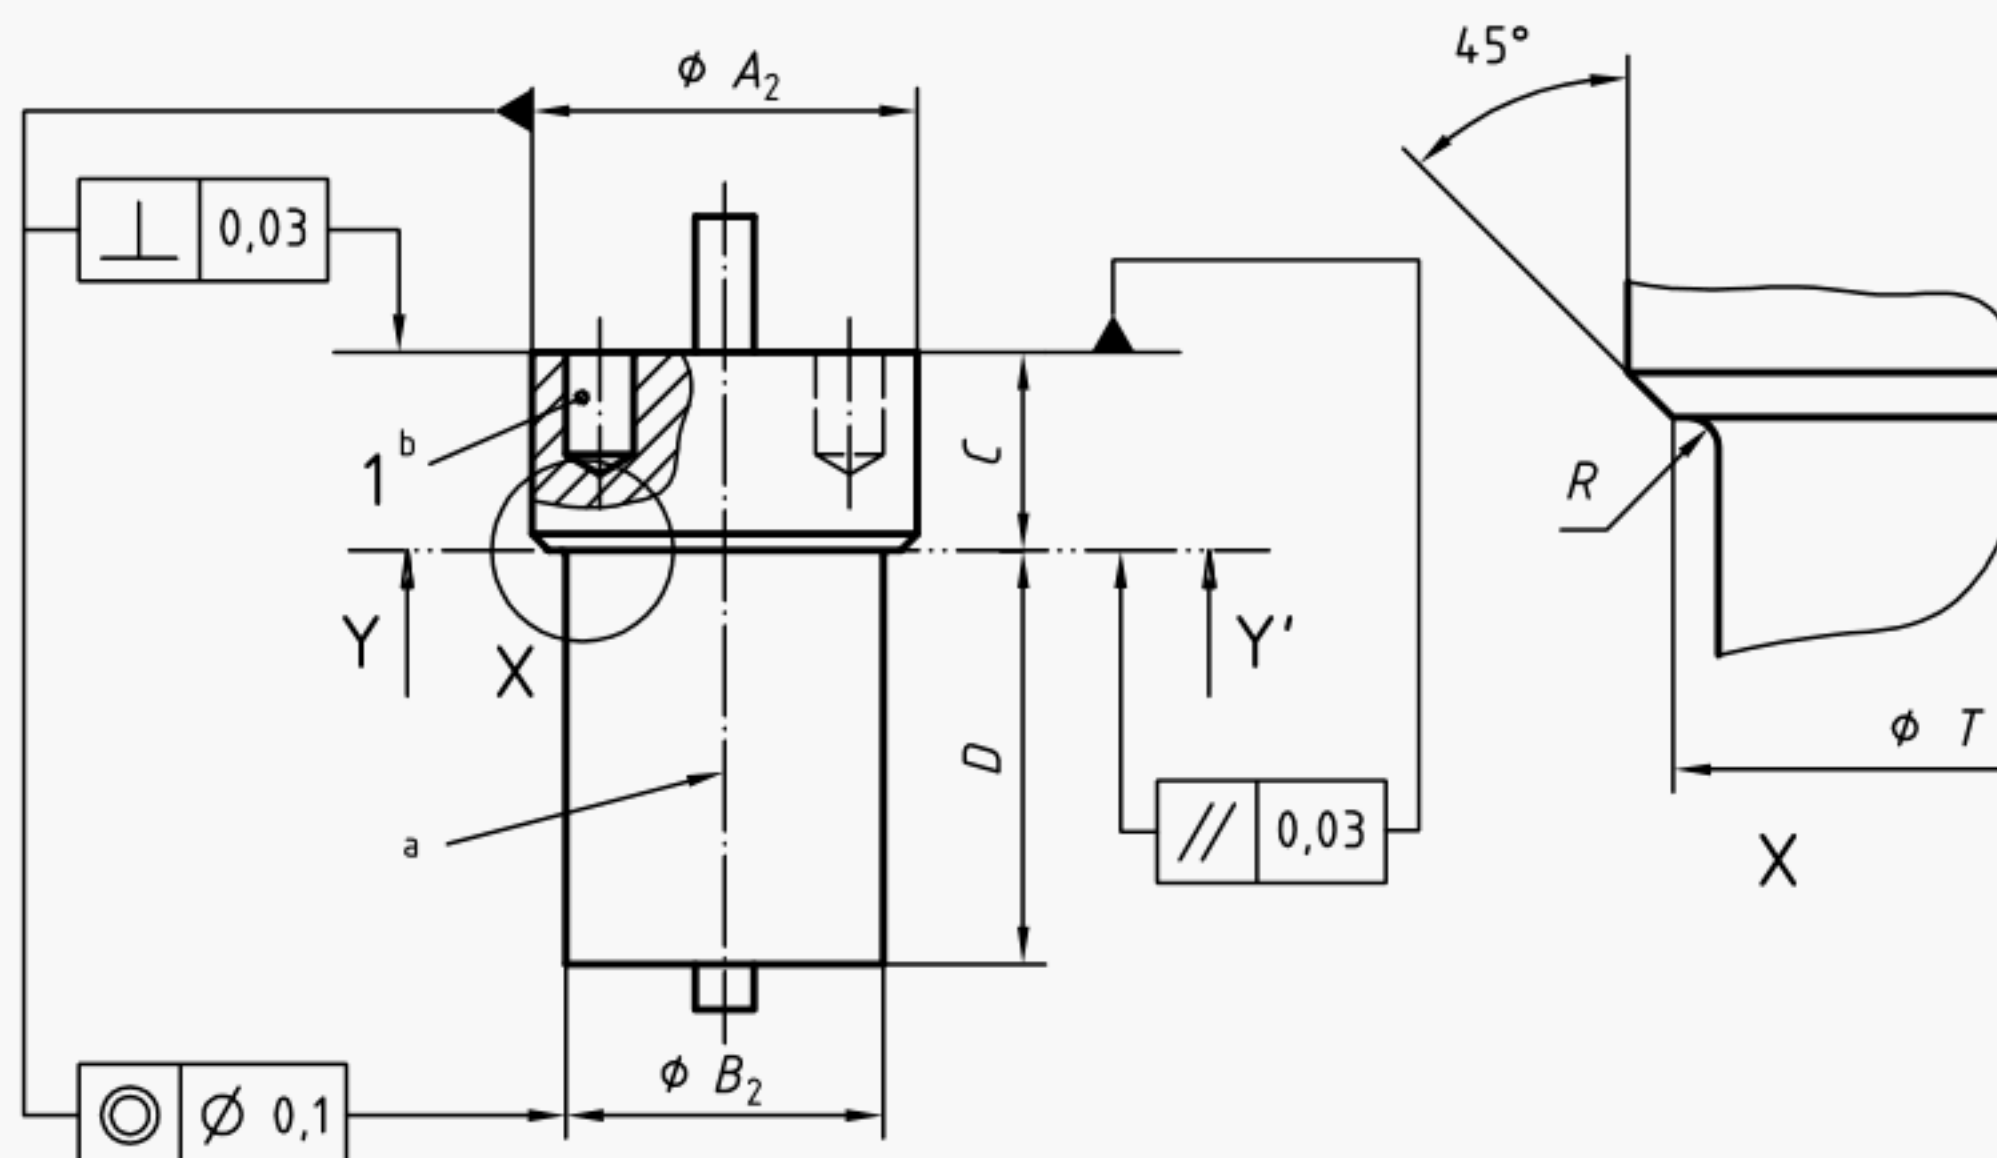**Key**

1 Fuel feed groove

a The reference axis for the nozzle passes through the centre of the circle of diameter  $A_2$ .

b A fuel feed groove is necessary only on nozzles without dowel holes and on nozzles having multiple fuel feed holes.

**Figure 2 — Pintle nozzle — Type B****Table 1**

Dimensions in millimetres

Nozzle type	Dimension						
	$A_2$	$B_2$	$B_2'$	$C$	$D$	$T$	$R$
A1 <sup>a</sup>	17 h11	9,2 max. <sup>b</sup>	8,9 min.	25 $\begin{smallmatrix} 0 \\ -0,6 \end{smallmatrix}$	26,5 $\begin{smallmatrix} +0,2 \\ -0,3 \end{smallmatrix}$	15,5 $\begin{smallmatrix} +0,5 \\ 0 \end{smallmatrix}$	0,6 max.
A2					38,5 $\begin{smallmatrix} +0,2 \\ -0,3 \end{smallmatrix}$		
B		14 c11	—	8 $\begin{smallmatrix} 0 \\ -0,4 \end{smallmatrix}$	19 ± 0,2	16,3 $\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	0,25 max.
a Preferred type							
b $B_2 \geq B_2'$							

4 Assembly of nozzles in nozzle holders

4.1 Dimensions and tolerances of the nozzle cap nut

See Figure 3 and Table 2.

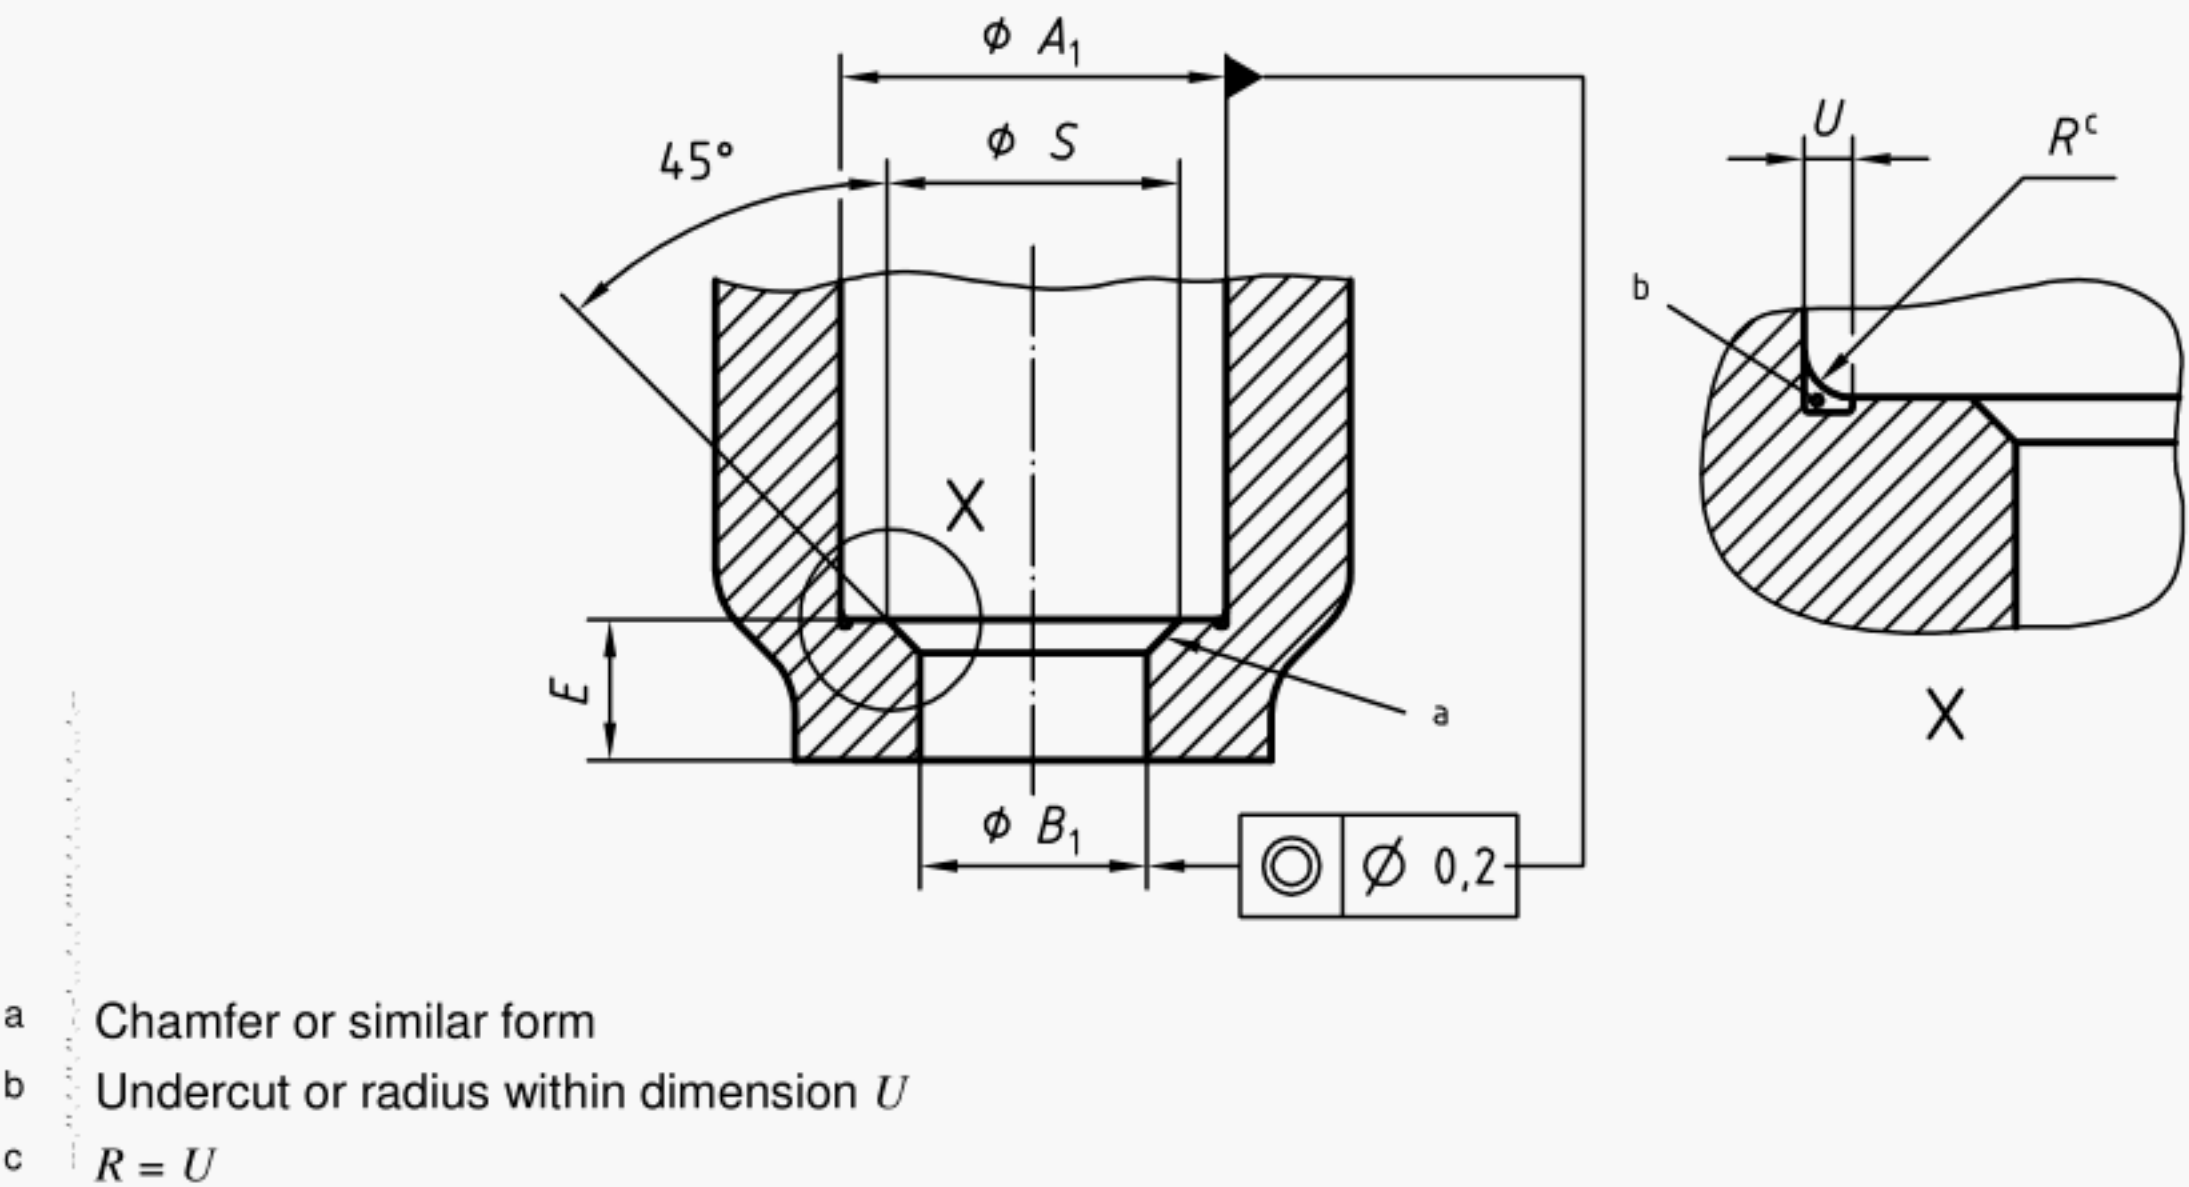


Figure 3 — Nozzle cap nut

Table 2

Dimensions in millimetres

Nozzle type	Dimension				
	$A_1$	$B_1$	$E$	$S$	$U$
A1 and A2	17 D13	$10^{+0,16}_{-0,05}$	$6,2^0_{-0,2}$	$11,5^{+0,3}_0$	0,4 max.
B		$14,3^{+0,2}_0$		$15,0 \pm 0,1$	0,2 max.

4.2 Dimensions and tolerances of the assembly

The assembly dimensions and tolerances given in Figure 4 apply to nozzle types A1, A2 and B and to nozzle holders of types 2 to 6 (ISO 2699), types 12 to 15 (ISO 7030) and types 20, 21, 21.1 and 27 (ISO 7026).


The dimensions of the nozzle holder dowels and the nozzle dowel holes, as well as the dimensions and tolerances for their position, are necessary only if requested by the customer.

5 Other dimensions and specifications

Dimensions and requirements not specified in this International Standard are left to the discretion of the manufacturer.



Dimensions in millimetres

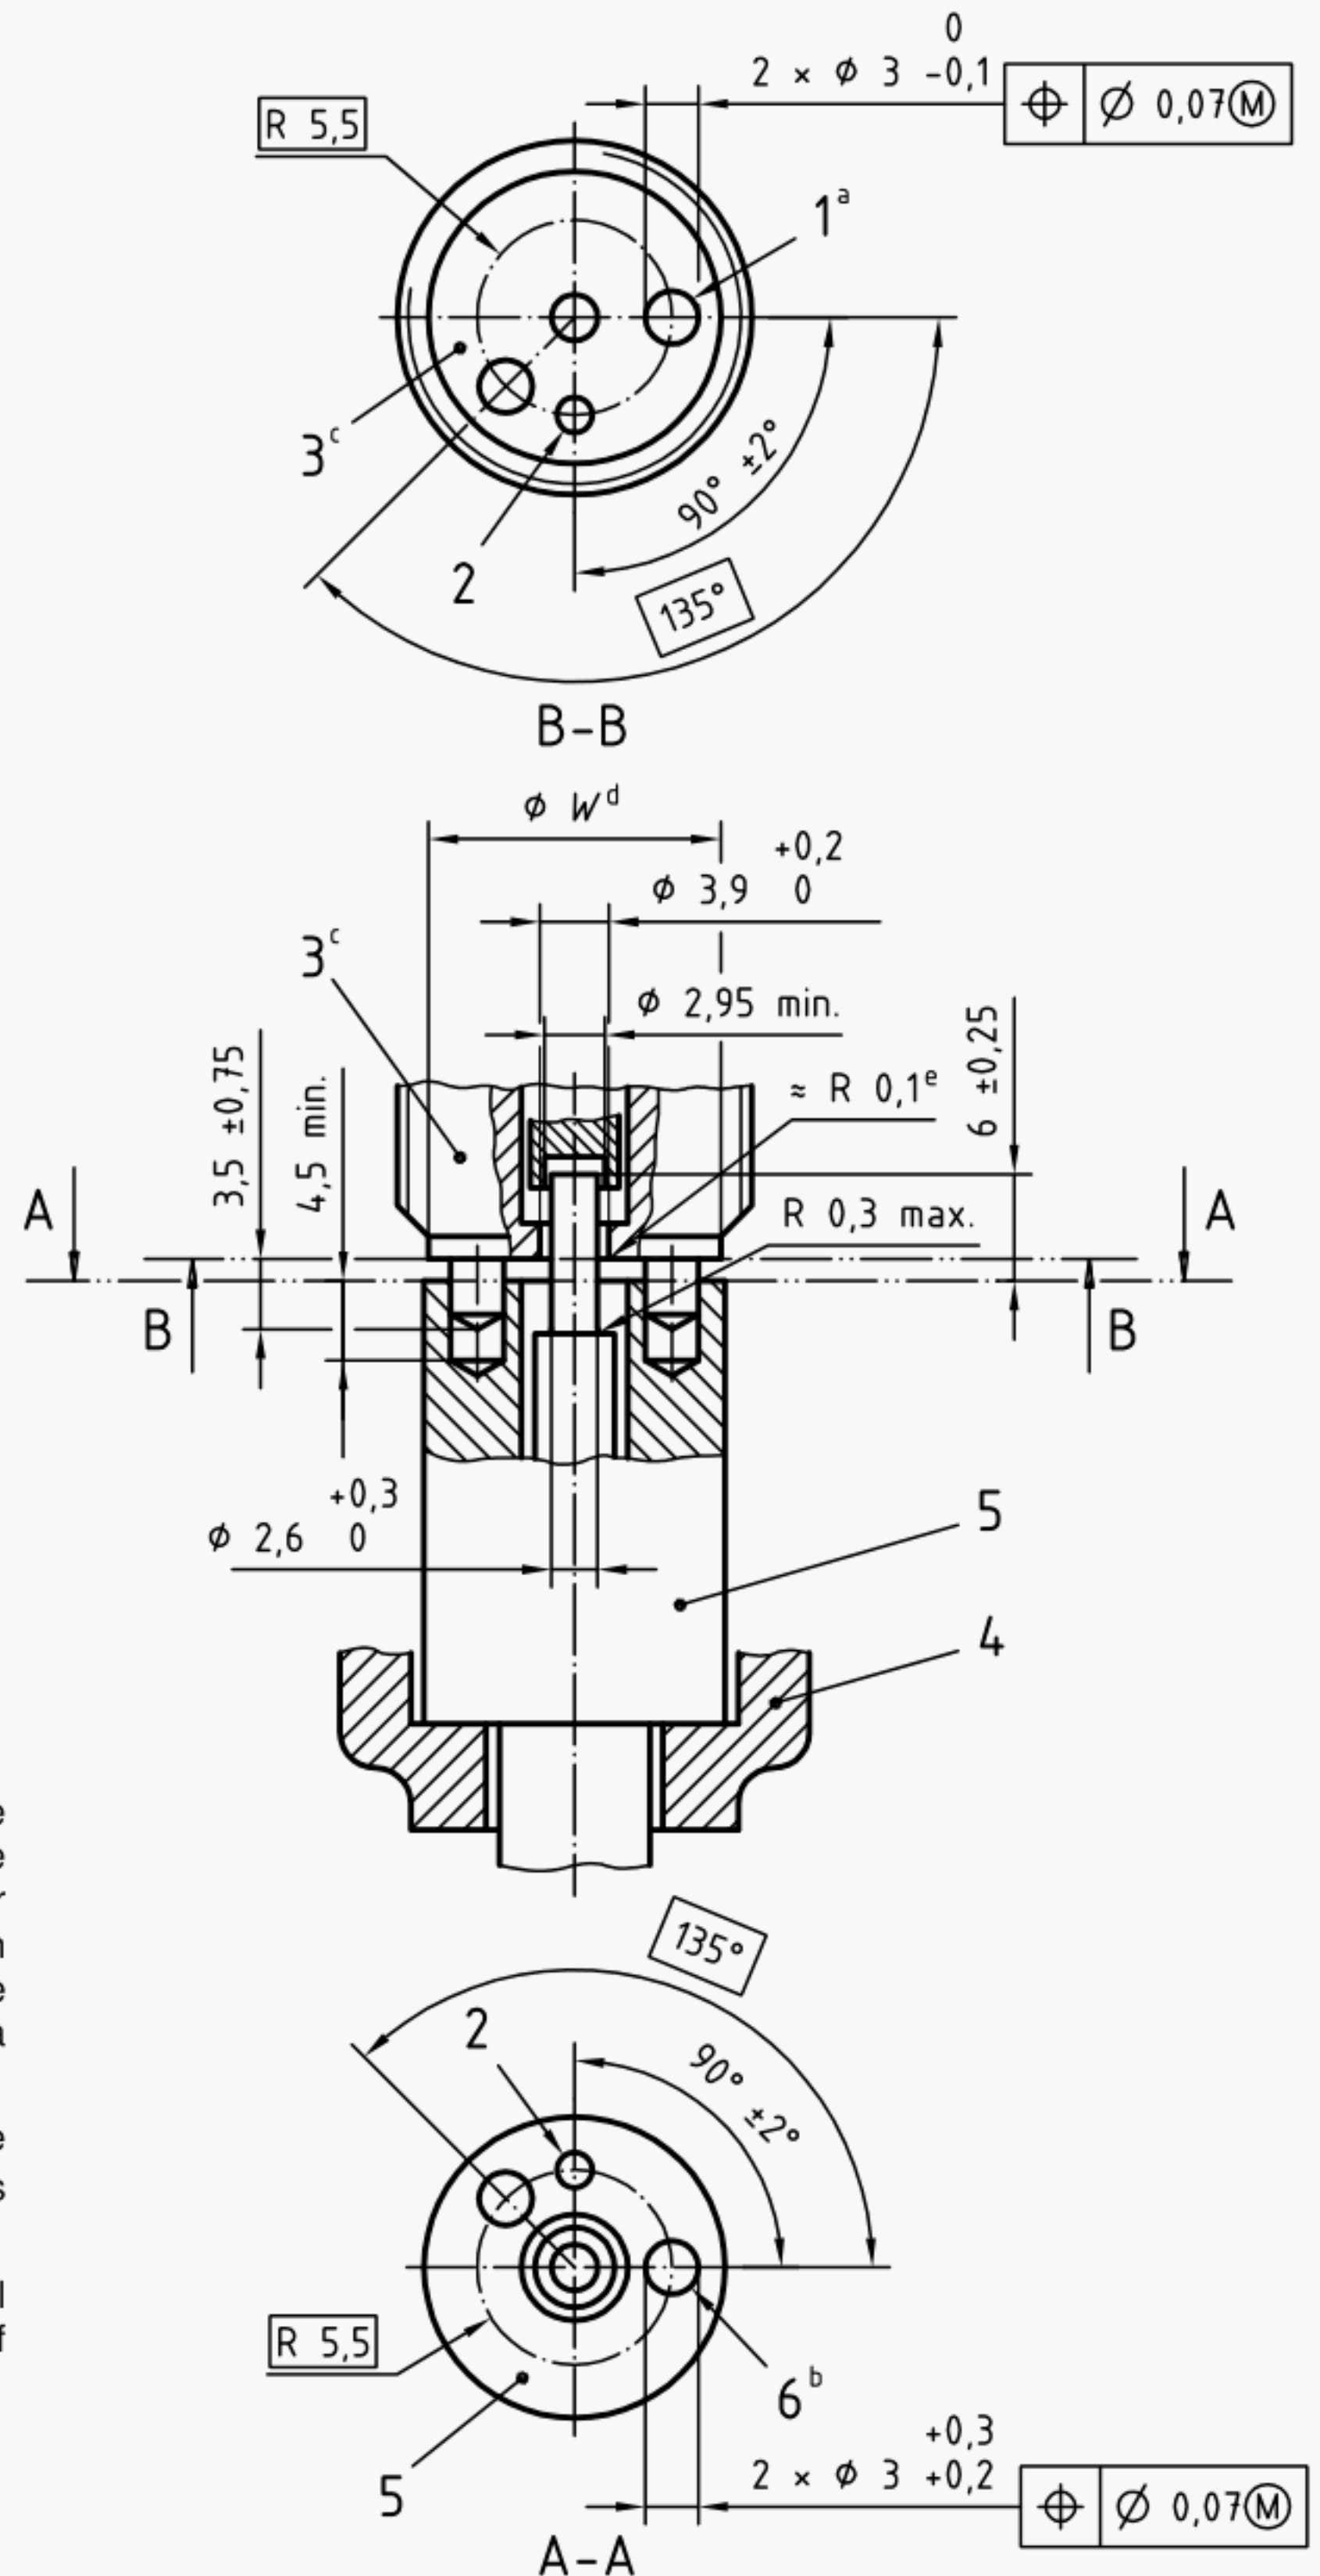

# Key

- 1 Reference dowel
- 2 Fuel feed hole position
- 3 Nozzle holder body
- 4 Nozzle cap nut
- 5 Nozzle
- 6 Reference dowel hole

- a The angular tolerance between the reference dowel and the locating device which fixes the position of the nozzle holder in the diesel engine is  $\pm 1^\circ$ . Depending on the design of the locating device, it may be necessary to consider the axis of a hole in a fixing flange, a fixing lug, or a fixing slot.
- b The angular tolerance between the reference dowel hole and the injection holes is  $\pm 1^\circ 30'$ .
- c The reference axis of the nozzle holder shall pass through the centre of the circle of diameter  $W$ .
- d Dimension  $W$  not specified.
- e Optional: equivalent chamfer.

Figure 4 — Assembly

## Annex A (normative)


### Hole type, short-stem nozzle — Type C

The hole type, short-stem nozzle, type C, conforms to the requirements for nozzle type B except for the dimension  $D$  shown in Figure A.1.

The cap nut used for fixing the type C nozzle shall be of the same type as that used for the type B nozzle (see 4.1).

Nozzle holders assembled with type C nozzles shall meet the requirements given in 4.2.

Dimensions in millimetres

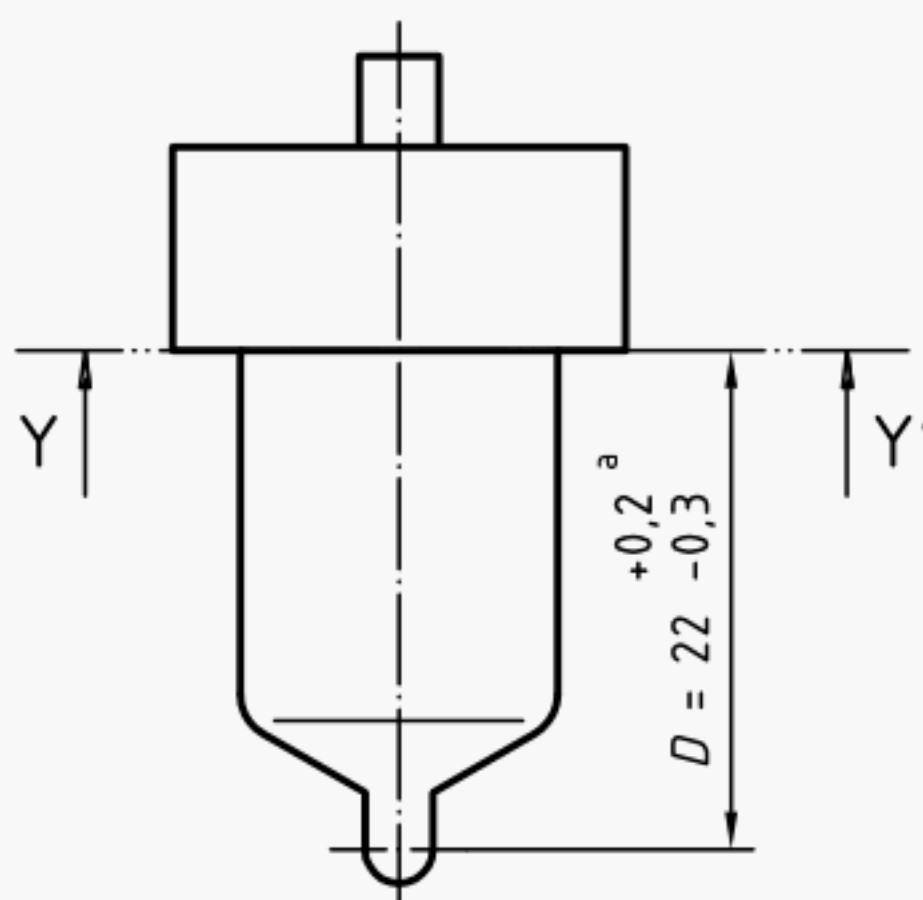

<sup>a</sup> This dimension determines the distance between the reference plan YY' and the point of intersection of the axes of the injection holes with the nozzle axis.

**Figure A.1 — Hole type, short-stem nozzle — Type C**



