

INTERNATIONAL STANDARD

ISO 9946

Second edition
1999-04-01

Manipulating industrial robots — Presentation of characteristics

Robots manipulateurs industriels — Présentation des caractéristiques



Reference number
ISO 9946:1999(E)

Contents

1 Scope 1

2 Normative references 1

3 Definitions 1

4 Units 1

5 Characteristics 2

5.1 General..... 2

5.2 Application 2

5.3 Power source 2

5.4 Mechanical structure 2

5.5 Working space 3

5.6 Coordinate system..... 6

5.7 External dimensions and mass 6

5.8 Base mounting surface 6

5.9 Mechanical interface..... 6

5.10 Control 6

5.11 Task programming and program loading..... 7

5.11.1 Examples of programming methods 7

5.11.2 Examples of program loading means 7

5.12 Environment 7

5.13 Load 7

5.14 Velocity 9

5.15 Resolution 9

5.16 Performance criteria	9
5.17 Safety	10
Annex A (informative) Recommended format of presentation for robot specifications	11
Annex B (informative) Description of the symbols of performance criteria — Abstract from ISO 9283	15

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 9946 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC 2, *Robots for manufacturing environment*.

This second edition cancels and replaces the first edition (ISO 9946:1991) of which it constitutes a technical revision.

Annexes A and B of this International Standard are for information only.

Introduction

ISO 9946 is part of a series of International Standards dealing with manipulating industrial robots. Other International Standards cover such topics as safety, performance criteria and related testing methods, coordinate systems, terminology, and mechanical interfaces. It is noted that these standards are interrelated and also related to other International Standards.

The number of manipulating industrial robots used in a manufacturing environment is constantly increasing and this has underlined the need for a standard format for the specification and presentation of robot characteristics.

The objective of ISO 9946 is to assist users and manufacturers in the understanding and comparison of various types of robots.

ISO 11593:1996 contains a vocabulary and a format for the presentation of automatic end effector exchange systems characteristics.

Annex A of this International Standard provides a recommended format for the presentation of robot specification.

Annex B provides a description of the symbols of performance criteria.

NOTE For the purposes of this International Standard, the term "robot" means "manipulating industrial robot".

— 10 —

Manipulating industrial robots — Presentation of characteristics

1 Scope

This International Standard specifies how characteristics of robots shall be presented by the manufacturer.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 8373:1994, *Manipulating industrial robots — Vocabulary*.

ISO 9283:1998, *Manipulating industrial robots — Performance criteria and related test methods*.

ISO 9409-1:1996, *Manipulating industrial robots — Mechanical interfaces — Part 1: Plates (form A)*.

ISO 9787:—¹⁾, *Manipulating industrial robots — Coordinate systems and motion nomenclatures*.

ISO 10218:1992, *Manipulating industrial robots — Safety*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 8373 and the following definition apply.

3.1

centre of the working space (C_w)

is the position of the wrist reference point when each active joint in the arm is in the middle position of its moving range

4 Units

Unless otherwise stated, all dimensions are as follows:

- length in millimetres (mm);
- angle in radians (rad) or degrees (°);
- time in seconds (s);
- mass in kilograms (kg);
- force in newtons (N);
- velocity in metres per second (m/s), radians per second (rad/s) or degrees per second (°/s).

1) This International Standard is subject to revision and the year of publication will be inserted at a later stage.

5 Characteristics

5.1 General

The manufacturer shall provide information related to the various characteristics and requirements as described in this clause as part of the robot documentation.

5.2 Application

The manufacturer shall specify the main type(s) of application(s) for which the robot is intended.

Examples of typical applications are

- handling;
- assembly;
- spot welding;
- arc welding;
- machining;
- spray painting;
- adhesive/sealing;
- inspection.

5.3 Power source

The manufacturer shall specify all external power sources, including type (e.g. electrical, hydraulic, pneumatic or combination) required for proper operation of the robot (e.g. mechanical structure motion actuators, control, auxiliary equipment [e.g. gripper]), together with the maximum power consumption required from each. These specifications shall also include permissible ranges and fluctuations.

The manufacturer shall also specify the type of power utilized to control axis and auxiliary motion (e.g. electric, hydraulic, pneumatic). Where more than one type of power is utilized, the manufacturer shall include a breakdown by individual motion.

5.4 Mechanical structure

The manufacturer shall specify the type of the mechanical structure and the number of mechanical axes. An outline drawing of the structure shall be provided detailing the axis motions. This drawing may be part of the drawing required for describing the working space (see 5.5).

Examples of mechanical structures:

- rectangular robot;
- cylindrical robot;
- polar robot;
- articulated robot.


If the robot is mobile, the way in which it is guided shall be indicated.

5.5 Working space

The boundaries of the working space of the wrist reference point including the alignment pose and centre of the working space (C_w) shall be illustrated in a drawing with at least two views (one the projection of the locus of the maximum reach of the robot arm in the base coordinate $X_1 - Y_1$ plane (see ISO 9787) and the other the projection of the locus of the maximum reach of the arm on the base coordinate $X_1 - Z_1$ plane). The drawing shall also provide information on any limitation of secondary axis motion at any point(s) in the working space of the wrist reference point (see figure 1 for an example of a 5-axis robot and figure 2 for an example of a 6-axis robot).

In the drawings, it is recommended that the details of the working space and range of movement of secondary axes are given in tabular form as shown in the examples of figures 1 and 2.

Dimensions in millimetres

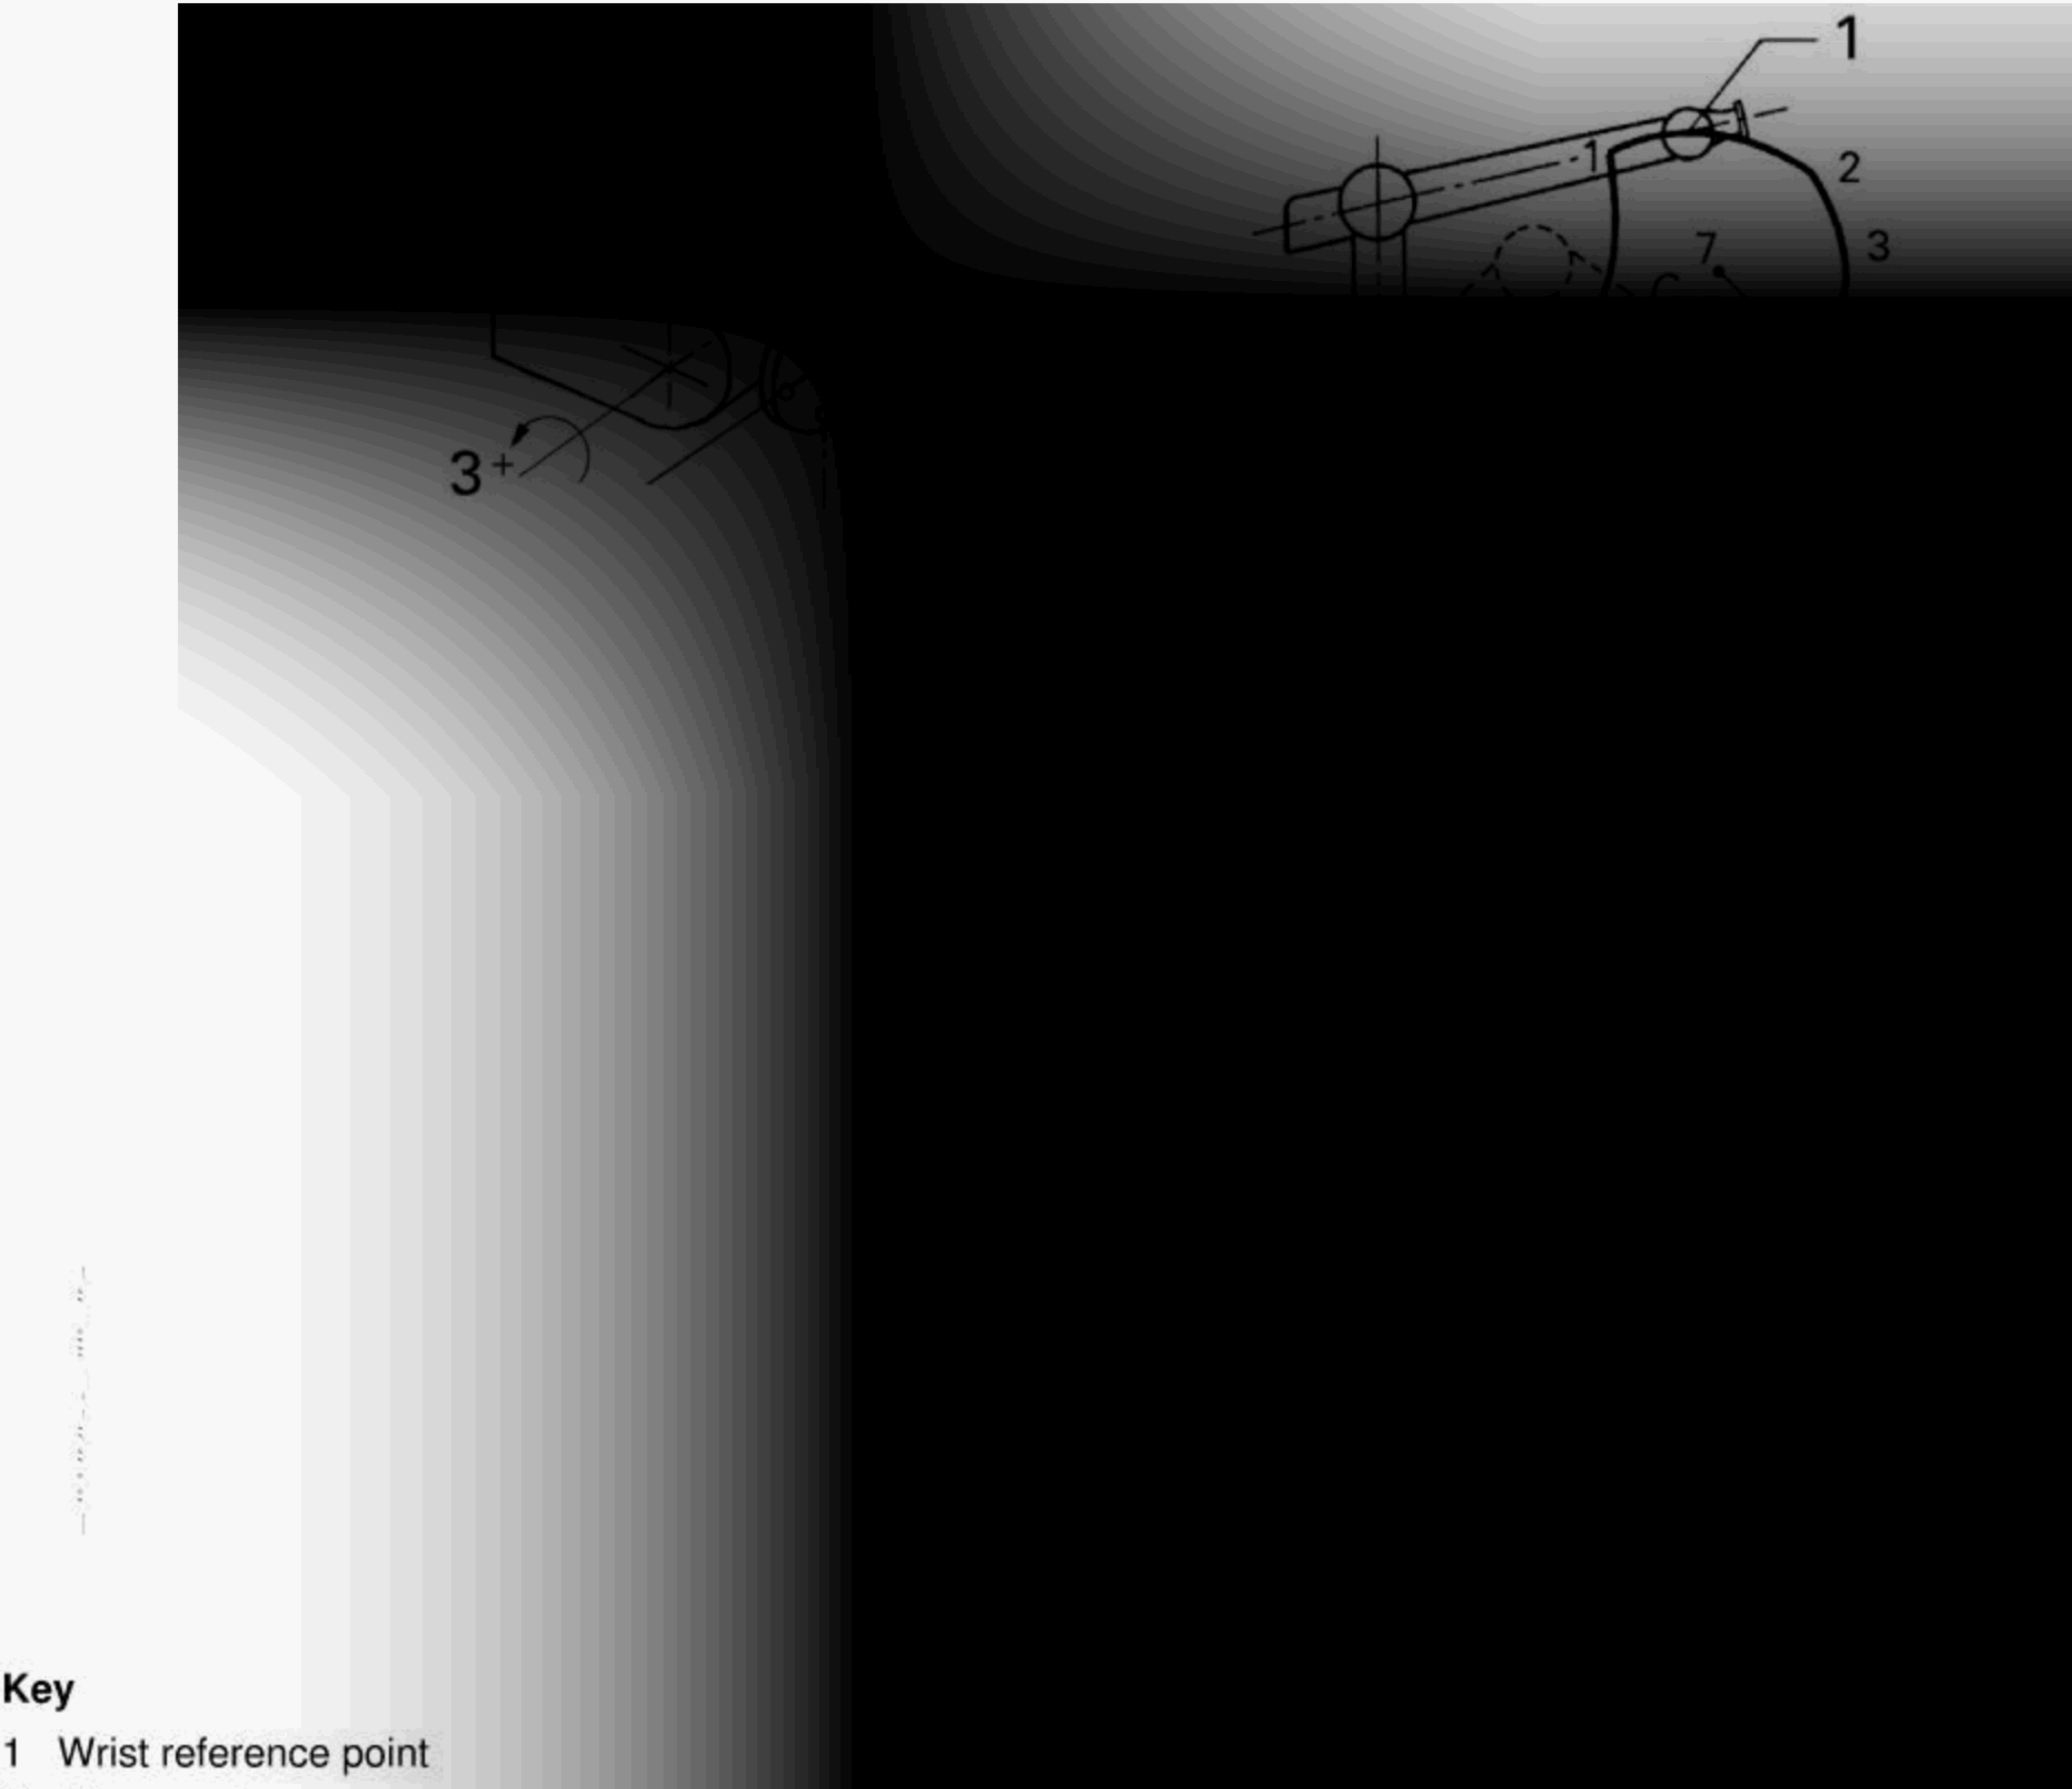


- Key**
- 1 Wrist reference point
 - 2 Alignment pose
 - 3 4th axis
 - 4 5th axis

Point in space	Working space of the wrist reference point		Range of movement of secondary axes	
	X ₁ (mm)	Z ₁ (mm)	4 th	5 th
1	925	1 635	+ 75° – 90°	+ 170° – 150°
2	1 610	1 550	+ 75° – 90°	± 180°
3	1 750	1 140	+ 75° – 105°	± 180°
4	1 310	345	+ 45° – 120°	± 180°
5	870	600	+ 45° – 120°	+ 150° – 170°
6	840	1 000	+ 75° – 120°	+ 140° – 150°
7	1 350	750	–	–

Figure 1 — Example of a 5-axis robot working space

Dimensions in millimetres

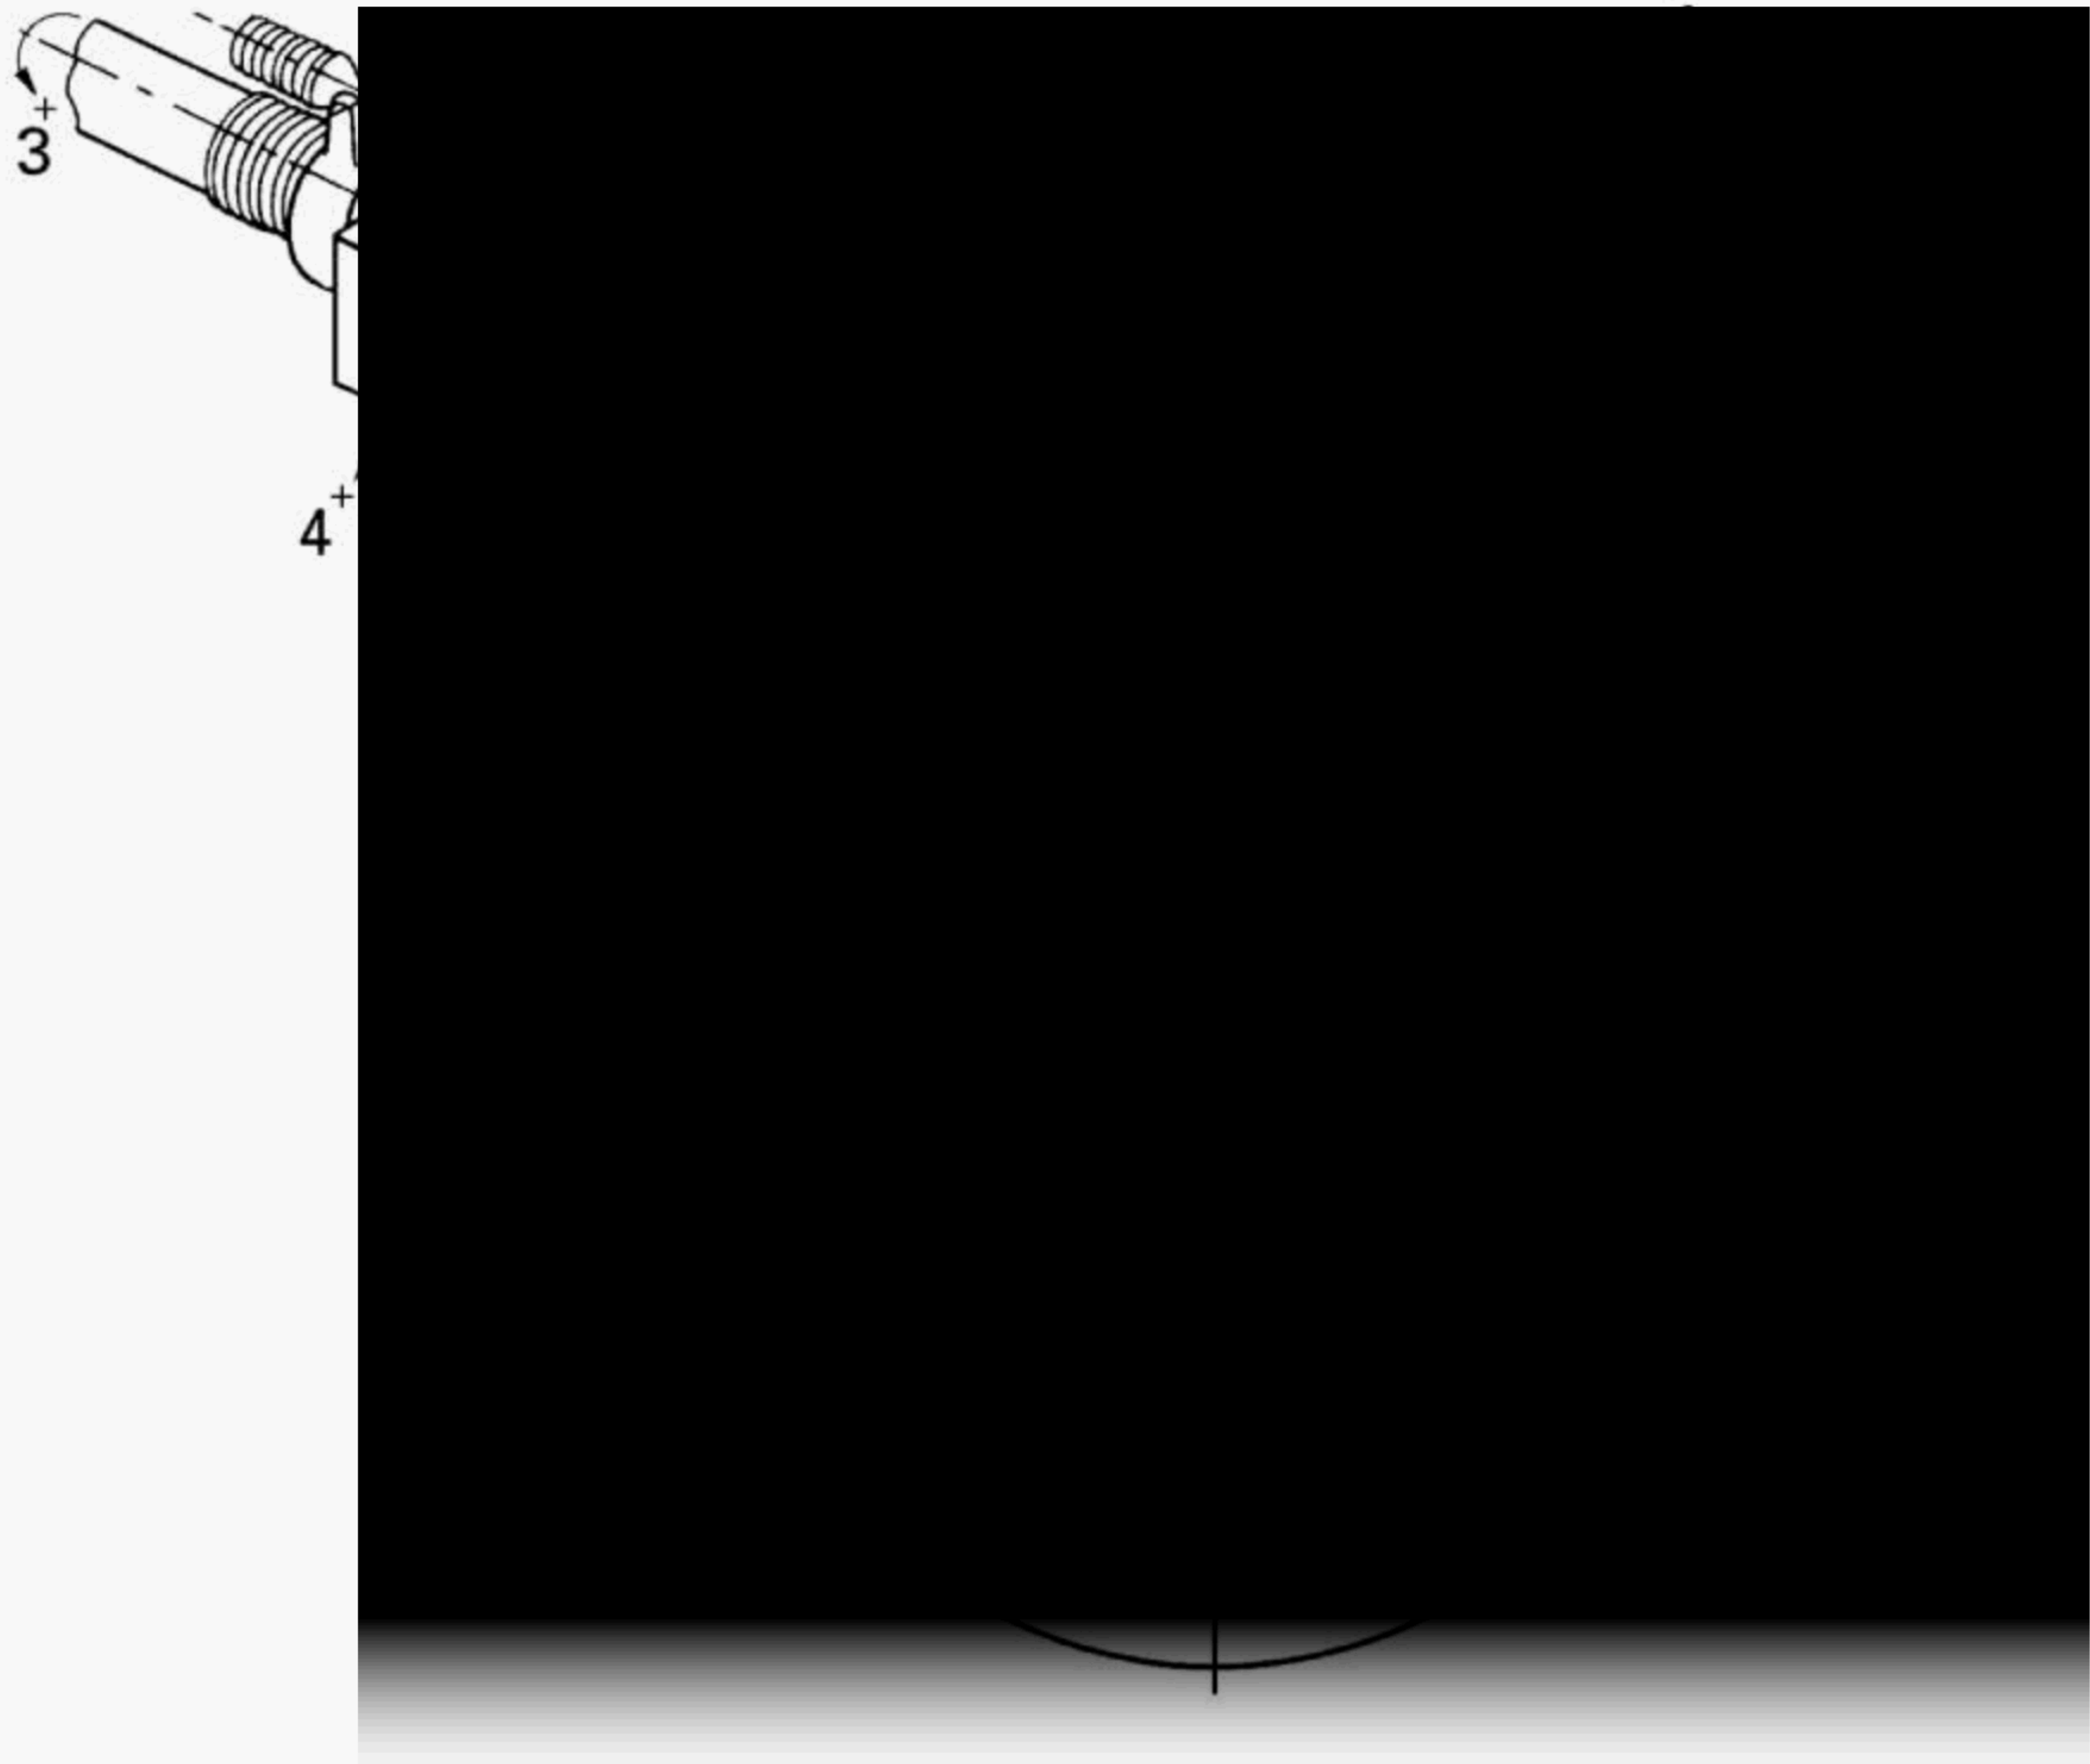

- Key**
- 1 Wrist reference point
 - 2 Alignment pose
 - 3 4th axis
 - 4 5th axis
 - 5 6th axis

Point in space	Working space of the wrist reference point		Range of movement of secondary axes		
	X ₁ (mm)	Z ₁ (mm)	4 th	5 th	6 th
1	925	1 635	± 210°	+ 75° – 90°	+ 170° – 150°
2	1 610	1 550	± 210°	+ 75° – 90°	± 180°
3	1 750	1 140	± 210°	+ 75° – 105°	± 180°
4	1 310	345	± 210°	+ 45° – 120°	± 180°
5	870	600	± 210°	+ 45° – 120°	+ 150° – 170°
6	840	1 000	± 210°	+ 75° – 120°	+ 140° – 150°
7	1 350	750	–	–	–

Figure 2 — Example of a 6-axis robot working space

5.6 Coordinate system

The manufacturer shall specify base and mechanical interface coordinate systems in accordance with ISO 9787. Any deviations to ISO 9787 shall be stated by the manufacturer.

5.7 External dimensions and mass

The manufacturer shall specify external dimensions in millimetres (mm), and mass in kilograms (kg) of the mechanical structure and control unit.

5.8 Base mounting surface

The manufacturer shall provide the base mounting surface description (for example in a drawing) and recommendations on the mounting of the robot base necessary to ensure that safe operation and rated performances are obtained.

The permissible mounting positions and orientations of the robot should be specified together with any limitations in safety or performance relative to each position and orientation.

5.9 Mechanical interface

The manufacturer shall provide the mechanical interface description including any drawings, specifications and recommendations necessary for mounting the end effector to the robot wrist. Where applicable, reference to appropriate International Standard(s) shall be provided (see, for example, ISO 9409-1).

5.10 Control

The manufacturer shall specify

- Control unit type and all relevant information, for example its capability, special provisions (e.g. control schemes).
- Task program memory storage:
 - basic capacity
 - maximum capacity
- Motion control method:
 - pose-to-pose (PTP)
 - continuous path (CP)
- Motion control type:
 - servo
 - non-servo
- Path interpolation method:
 - linear
 - circular
 - parabolic
 - other
- Number of controlled axes:
 - basic number of axes
 - additional number of axes (with interpolation)
 - additional number of axes (without interpolation)
- Pendant/operator controls
- Input/output interfaces:
 - signal types and levels
 - continuous or multiplexed signal

- Data interfaces:
data formats/control formats
- Network interfaces:
physical characteristics
communication protocols

5.11 Task programming and program loading

The manufacturer shall specify the type of task programming method and the means used for program loading.

5.11.1 Examples of programming methods

- Manual Data Input
- Teach
manually leading the robot end effector
manually leading the robot on a mechanical simulating device
manually programming by a teach pendant
- Off-line
- Goal directed

5.11.2 Examples of program loading means

- Data links
- Disks
- Tapes
- Memory cards

5.12 Environment

The manufacturer shall specify the limits of environmental conditions within which the rated performances can be achieved, or the degree of protection of the robot against environmental conditions.

The manufacturer shall specify the limits for storage and operation without damage when different.

Environmental conditions include but are not necessarily limited to

- Temperature (operating and storage/transport)
(degrees Celsius) (°C)
- Relative humidity (per cent) (%)
- Altitude limit (metres) (m)
- Electromagnetic interference
- Atmospheric contaminants
- Vibrations

5.13 Load

The various load characteristics shall be specified in terms of

- mass (kilograms) (kg)


- thrust (newtons) (N)
- torque (newton metres) (N·m).

These values should be stated in terms of the mechanical interface coordinate system.

The manufacturer shall specify the rated load of the robot. It is recommended that the relation between the maximum mass and the position of the centre of gravity of the mass is shown as in figure 3.

Where required, the manufacturer shall specify any limitation of the load and what influence it has on other specified characteristics and conditions (e.g. velocity, acceleration). Where the robot can carry some additional mass (e.g. mass on arm) it shall be specified.


Where required, the manufacturer shall specify the maximum thrust and maximum torque (see figure 4). Where thrust and torque are dependent on the robot configuration then this shall be specified.

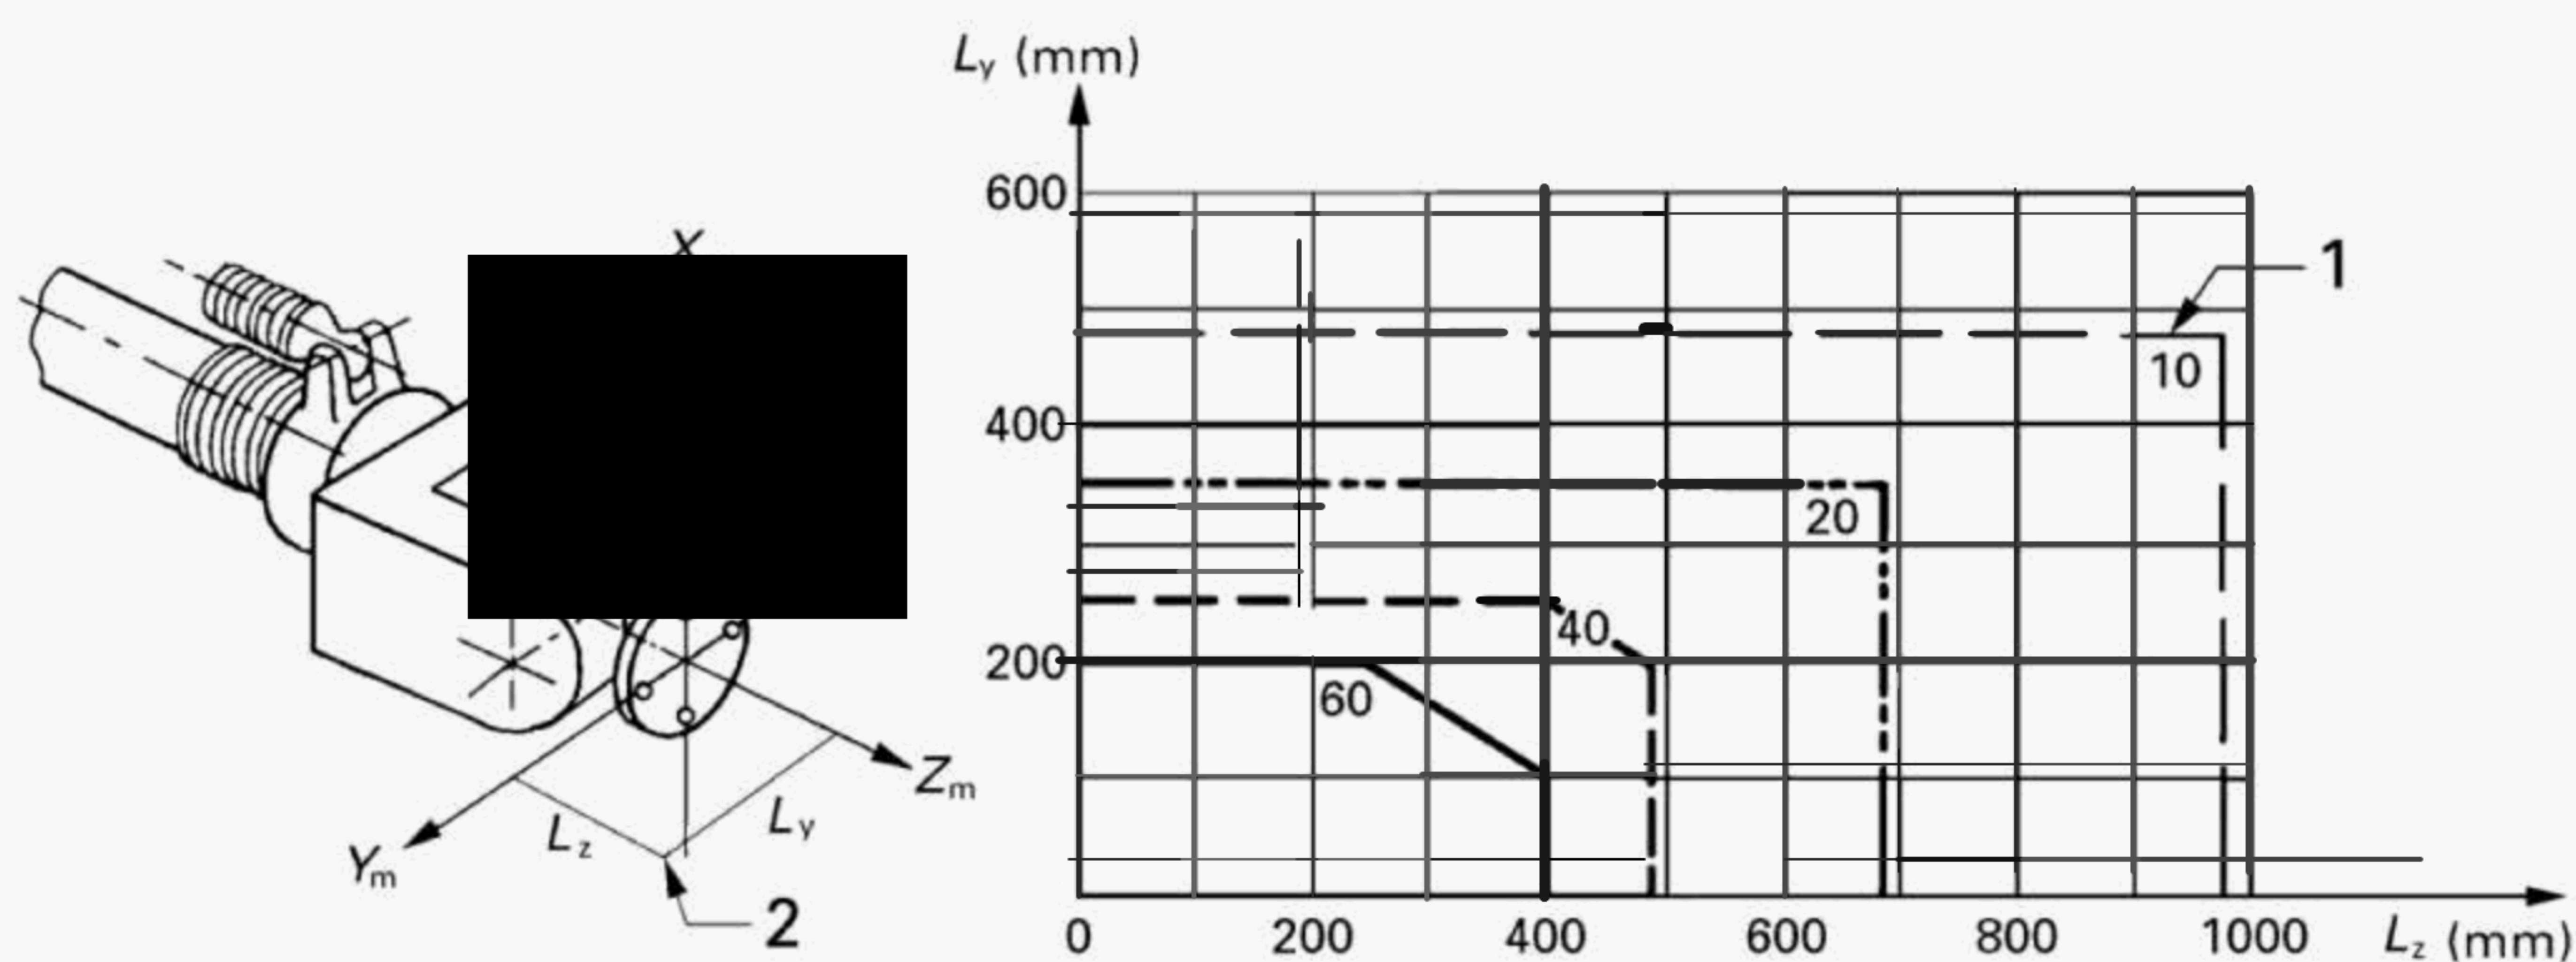

Key

- 1 Mass (kg)
- 2 Centre of gravity of the mass

Figure 3 — Load diagram

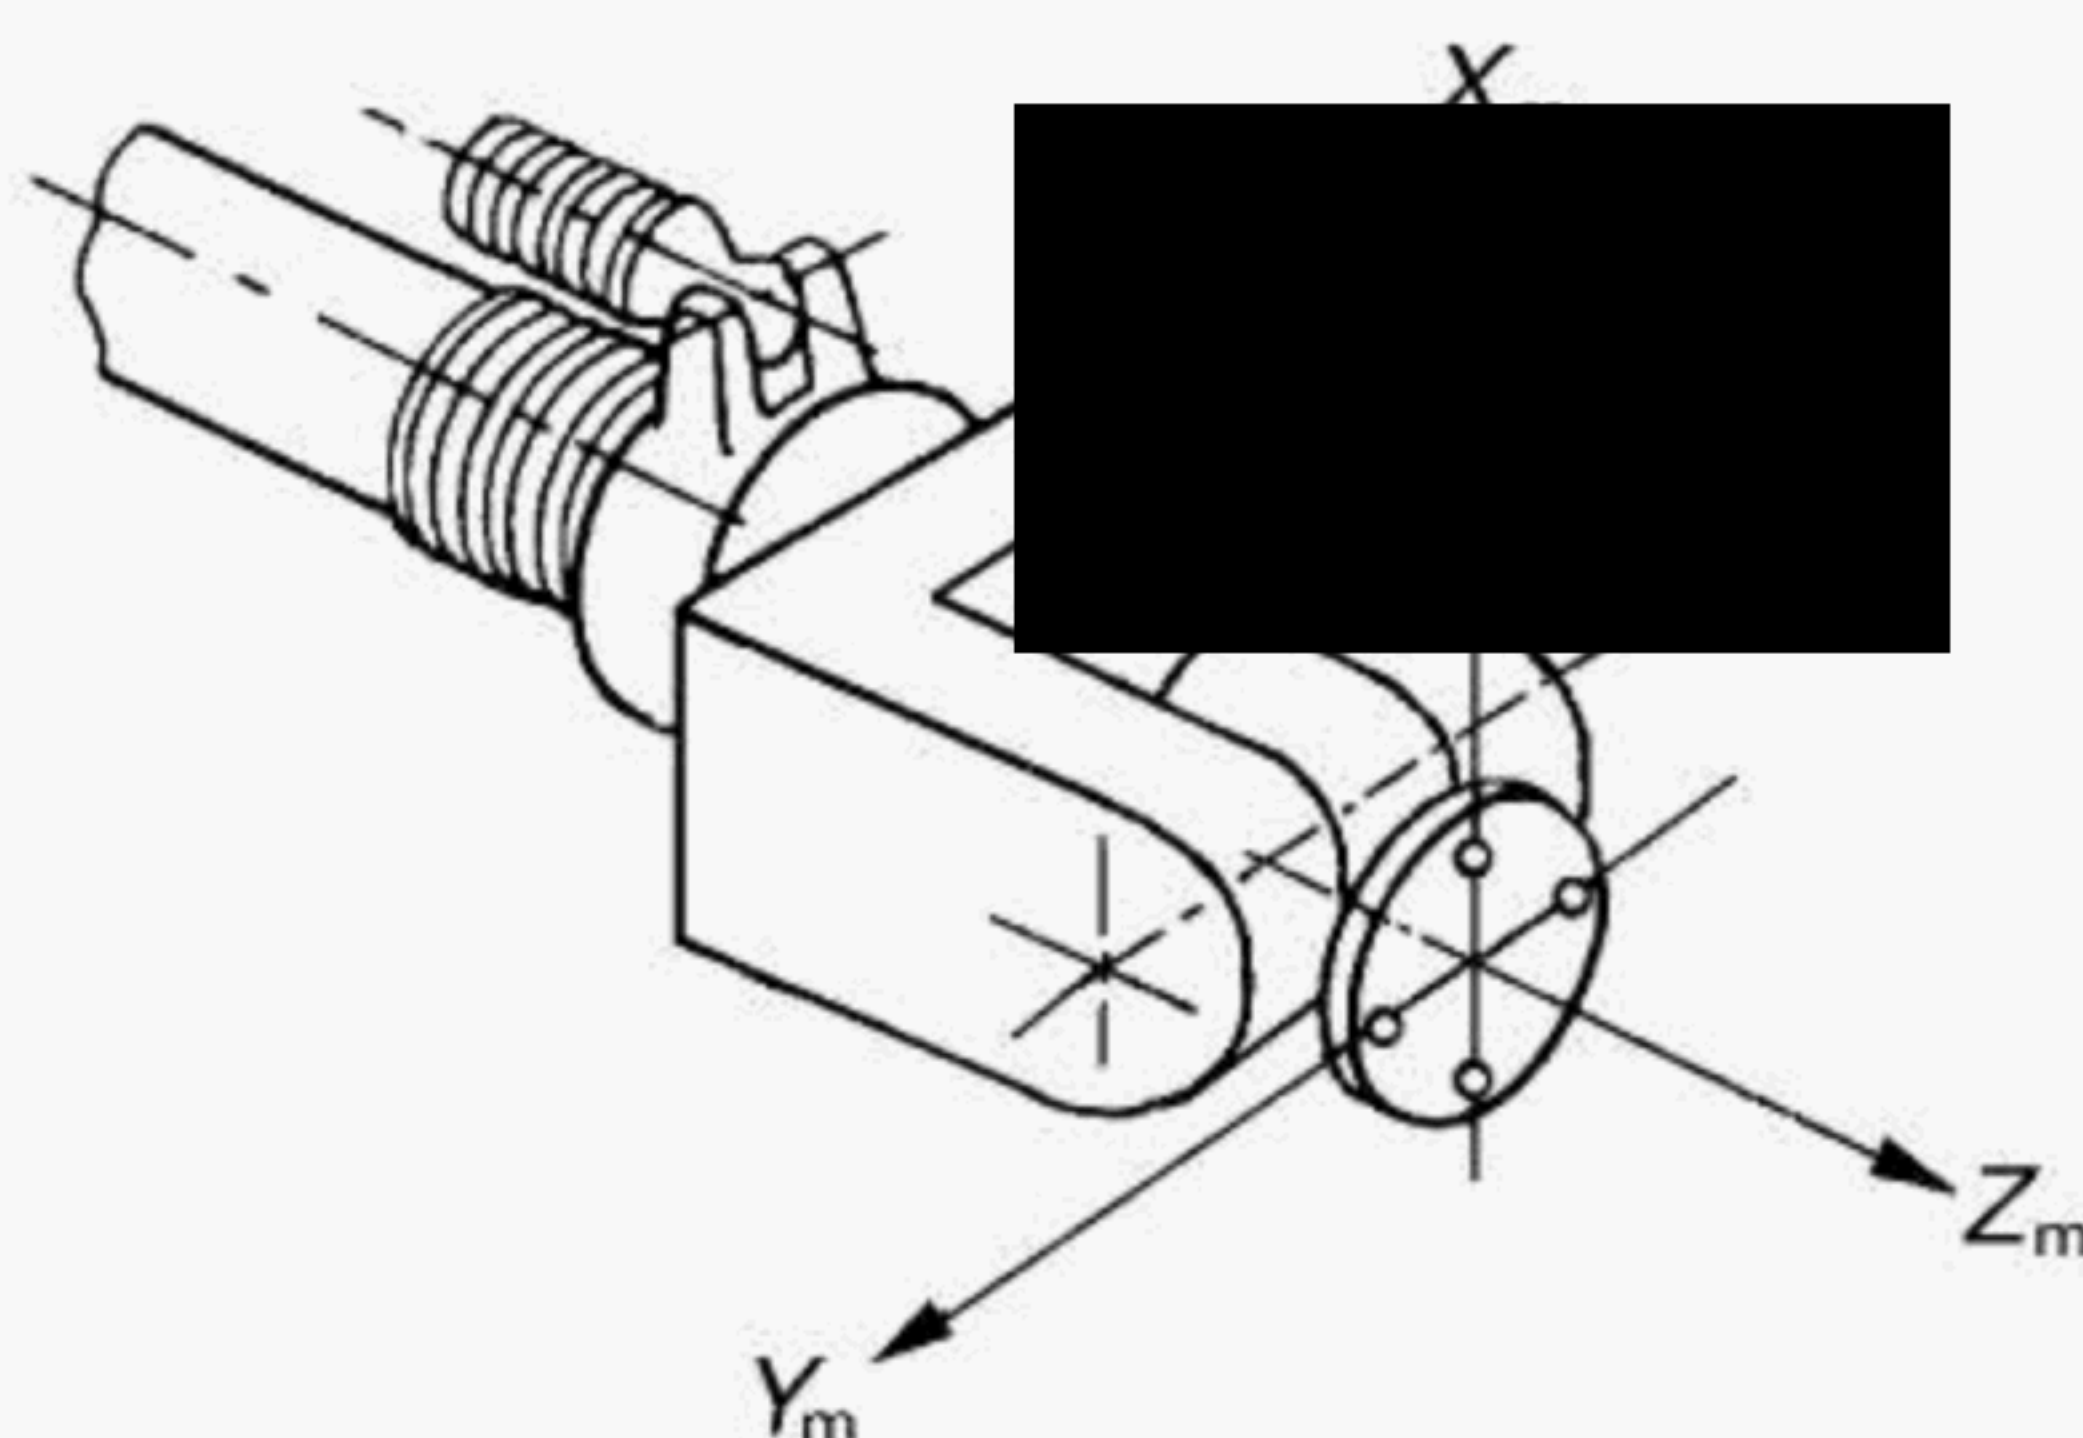

Axis	Thrust N	Torque N·m
X_m		
Y_m		
Z_m		

Figure 4 — Thrust and torque values

5.14 Velocity

Unless otherwise stated, the manufacturer shall specify the velocity under the following conditions:

- at a constant rate of distance per unit of time where no acceleration or deceleration is active;
- with the rated load applied.

The manufacturer shall specify at least

- the maximum individual axis velocity for each axis;
- the rated path velocity with the shape of the path and the related performance criteria.

5.15 Resolution

For servo-controlled axes, the manufacturer shall specify the resolution of each axis in terms of millimetres, or radians, or degrees, whichever is appropriate.

5.16 Performance criteria

The manufacturer shall provide information in accordance with ISO 9283 for those performance criteria which are guaranteed. The performance criteria in ISO 9283 are the following:

- pose accuracy and pose repeatability;
- multi-directional pose accuracy variation;
- distance accuracy and distance repeatability;
- position stabilization time;
- position overshoot;
- drift of pose characteristics;

- exchangeability;
- path accuracy and path repeatability;
- path accuracy on reorientation;
- cornering deviations;
- path velocity characteristics;
- minimum posing time;
- static compliance;
- weaving deviations.

5.17 Safety

The manufacturer shall specify that the robot complies with ISO 10218 or other relevant safety standards.

Annex A

(informative)

Recommended format of presentation for robot specifications

Date of issue

.....

Trademark	Manufacturer's name Model Type						
Country							
Main application(s) (see 5.2) Power source (see 5.3): <ul style="list-style-type: none"> — external (types and characteristics) — maximum power consumption — robot axis consumption — auxiliary motions consumption..... 							
Mechanical structure, working space and coordinate system (see 5.4, 5.5 and 5.6) <div style="border: 1px solid black; height: 150px; margin-top: 10px; padding: 10px;"> Drawing </div>							
External dimensions and mass (see 5.7) <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="width: 50%; text-align: center; padding: 10px; vertical-align: top;"> Mechanical structure </td> <td style="width: 50%; text-align: center; padding: 10px; vertical-align: top;"> Control unit </td> </tr> <tr> <td style="height: 100px;"></td> <td style="height: 100px;"></td> </tr> <tr> <td style="text-align: center; padding: 5px;"> Mass kg </td> <td style="text-align: center; padding: 5px;"> Mass kg </td> </tr> </table>		Mechanical structure	Control unit			Mass kg	Mass kg
Mechanical structure	Control unit						
Mass kg	Mass kg						

<div>Base mounting surface (see 5.8)</div> <div><div>Drawing</div><div></div></div> <div></div>	<div>Mechanical interface (see 5.9)</div> <div><div>Drawing</div><div></div></div> <div></div>
<div>Control (see 5.10)</div> <div>Control unit type</div> <div>Number of controlled axes</div> <div>Task program memory storage</div> <div> basic capacity</div> <div> max. capacity</div> <div>Motion control type</div> <div>Motion control method.....</div> <div>Path interpolation method</div>	<div>Pendant/operator controls</div> <div></div> <div>Input/output interfaces</div> <div></div> <div>Data/network interfaces.....</div> <div></div>
<div>Programming method and loading means (see 5.11)</div>	

Environment (see 5.12)	Operating	Storage/transport
Temperature °C °C
Relative humidity % %
Altitude limit m m
Electromagnetic interferences
.....
.....
Atmospheric contaminants
Vibrations
.....
.....

Load (see 5.13)

Rated load

Load diagram

Limiting load

Axis	Thrust	Torque
X _m N N·m
Y _m N N·m
Z _m N N·m

Additional mass.....

Remarks:

.....

.....

.....

Axis number	Individual axis velocity (see 5.14)	Resolution (see 5.15)
1		
2		
3		
4		
5		
6		

Performance criteria (see 5.16)				Posing time	
Pose characteristics 100 % and optional 10 % of rated load, 100 % and 50 and/or 10 % of rated velocity				Distance	Time
AP _p =	vAP _p =	Stabilisation time	=		
AP _a =	vAP _a =	Position overshoot	=		
AP _b =	vAP _b =	For limit band	=		
AP _c =	vAP _c =				
RP _l =	AD =	Drift diagram		Static compliance	
RP _a =	RD =		 mm/N along X ₁	
RP _b =			 mm/N along Y ₁	
RP _c =			 mm/N along Z ₁	

Path and weaving characteristics				Path velocity characteristics			
Shape of the path..... 100 % and optional 10 % of rated load				100 % and optional 10 % of rated load			
Rated path velocity							
10 %	50 %	100 %	100 % of rated path velocity		AV	RV	FV
AT _p =	AT _p =	AT _p =	=	Rated path velocity	10 %		
AT _a =	AT _a =	AT _a =	=		50 %		
AT _b =	AT _b =	AT _b =	=		100 %		
AT _c =	AT _c =	AT _c =	=	100 % of rated path velocity			
RT _p =	RT _p =	RT _p =	=				
RT _a =	RT _a =	RT _a =	=				
RT _b =	RT _b =	RT _b =	=				
RT _c =	RT _c =	RT _c =	=				
CR =	CR =	CR =	=				
CO =	CO =	CO =	=				
WS =	WS =	WS =	=				
WF =	WF =	WF =	=				

Safety (see 5.17)
Compliance with

Annex B (informative)

Description of the symbols of performance criteria — Abstract from ISO 9283

The symbols used in annex A for performance criteria comply with ISO 9283. The description of these symbols is as follows:

AP	pose accuracy
RP	pose repeatability
vAP	multi-directional pose accuracy variation
AD	distance accuracy
RD	distance repeatability
t	position stabilization time
OV	position overshoot
dAP	drift of pose accuracy
dRP	drift of pose repeatability
E	exchangeability
AT	path accuracy
RT	path repeatability
CR	cornering round-off error
CO	cornering overshoot
AV	path velocity accuracy
RV	path velocity repeatability
FV	path velocity fluctuation
WS	weaving stroke error
WF	weaving frequency error

Indices a, b, c indicate an orientation characteristic about the X-, Y-, Z-axis. Index p indicates a position characteristic.

ICS 25.040.30

Price based on 15 pages
